


# Quote Development Packet for: Proposed JOC Layout (DRAFT)




Mayor's Office of  
EMERGENCY  
MANAGEMENT  
300 City Hall  
Boston, MA 02108

Are you ready? Visit [www.cityofboston.gov/readyboston](http://www.cityofboston.gov/readyboston).

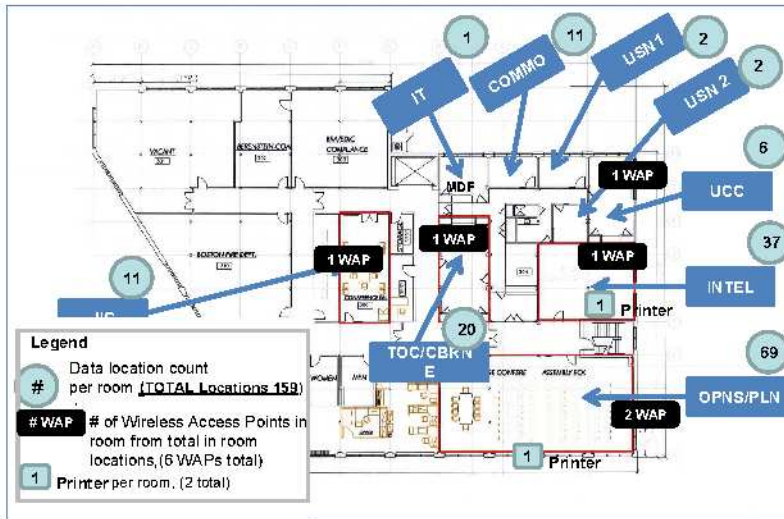


# Intel Layout Drill Down

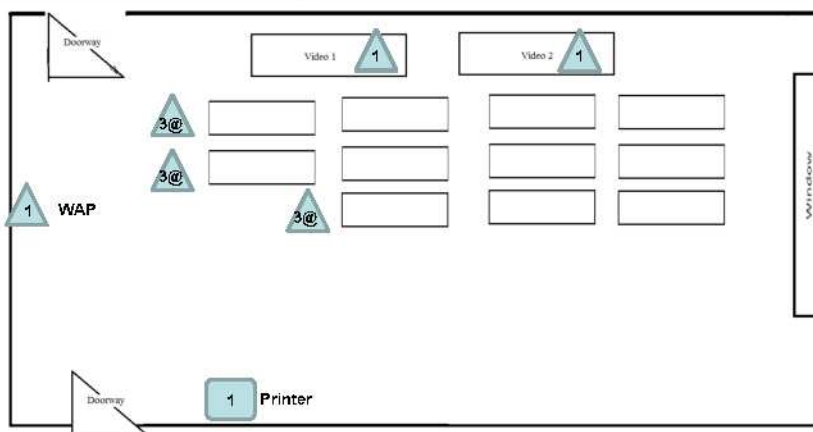

37 TOTAL



# OPS/PLN Layout Drill Down

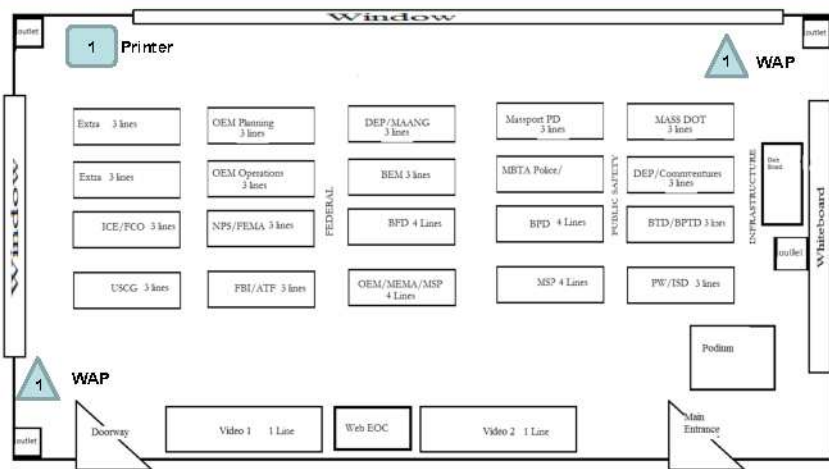

**69 TOTAL**

Mayor's Office of  
EMERGENCY  
MANAGEMENT  
X-1000-1-0000  
04/17

Are you ready? Visit [www.cityofboston.gov/readyboston](http://www.cityofboston.gov/readyboston).



## Quote to include, but not limited to:

- § Cabling: Category 6, plenum rated, color-white
- § Cable to be self-supported/attached to wood beams and/or drywall in a neat & workman like manner.
- § Terminate cable on RJ45 category 6 jack, mounted where able. Cables run to reach tables in the middle of rooms may be dropped from ceiling or to wall to be housed in wire mold, at the request of the city.
- § All cables to be installed, terminated, and labeled per industry standards.
- § Though to be properly run, cables are not to be mounted in a permanent manner, in order to allow easy removal later.
- § Furnish and install associated termination patch panels into MDF cabinet (already purchased)
- § Furnish 95, three (3) foot, Cat 6 cross connect cables – color blue
- § Furnish 64, five (5) foot, Cat 6 cross connect cables – color blue
- § Furnish 150, seven (7) foot, Cat 6 cross connect cables – color blue
- § Furnish 7, twelve (12) foot, Cat 6 cross connect cables – color blue
- § Furnish 2, twenty-four (24) foot, Cat 6 cross connect cables – color blue
- § Work to be completed during normal business hours

NOTE: Vendor will site survey location to assist with quote development

